

Decrasound Acoustiscreen

PET Polyester Fibre Hanging



Carved Screens

Acoustiscreen Polyester Hanging Screens are designed to provide maximum decorative design flexibility while at the same time significantly improving the sound quality of internal spaces by minimising reverberation. The Acoustiscreen Polyester Hanging Screens range provides both colour and perforated patterns acoustic control. Our Acoustiscreen Polyester Hanging Screens are available in up to 43 colours and more than 50 carved patterns. Hanging screens are suitable for Classrooms, commercial premises and multiuse rooms.

Acoustiscreen base material can be used also as creative solutions where noise control and aesthetic appeal is a major consideration. The appearance of the Acoustiscreen Polyester Hanging Screens with the various carved patterns is a direct response, to discover the limitless design flexibility of Acoustiscreen polyester fibre panels. Available in over 50 standard design patterns Acoustiscreen Polyester Hanging Screens are a great addition to any large functional space.

Features & Benefits

- Outstanding quality and superb acoustic performance..
- These versatile panels are easy to cut and modify.
- Modernise the look of a room with our unique colour palette.
- Humidity and moisture resistant.

- Odourless, low-VOC content and non-toxic.
- Group 1 AS5637. ASTM E84 Class A, EN 13501-1:2007
 +A1:2009 Class B
- Lightweight (approx. 2.4kg/m2 for 12mm thick panel) and easy to install. Hanging kit included
- 50 standard pre-cut patterns

Common panel sizes	1200 mmx 2400 mm
Thickness (mm)	Standard is 9mm and 12mm
Naminal Wainh	2.4kg/m2 at 12mm thick 1900gsm at 9mm
Nominal Weight	2.4kg/m2 at 12mm thick 1900gsm at 9mm
Composition	100% PET, approx.
	75% recycled content.
Material Type	Non-woven Fibrous Board
Environmental	Non-toxic, odourless, low VOC, E0 EN717-1:2004
Typical Applications	Boardrooms and Meeting Rooms, Gyms, Multi purpose venues, Schools and Multi use spaces



PET Polyester Fibre Hanging
Carved Screens



Acoustic Performance

By incorporating Acoustiscreen Polyester Hanging Screens as either a space dividing panel the reduction in unwanted noise can be quite significant. At some frequencies, up to 100% of sound can be absorbed by utilising Acoustiscreen Panels of appropriate thickness and/or by installing the panels with an air space behind them. Acoustiscreen Panels have been tested in ILAC registered laboratories in a reverberation chamber. Low frequency absorption can be increased by installing the panels with an air gap behind them, or by increasing the thickness of the panel.

Thickness (mm)	Sound Absorption Coefficient								
	125	250	500	1000	2000	4000	NRC		
9mm	0.69	0.75	0.75	0.79	0.75	0.84	0.80		
12mm	0.10	0.45	0.80	0.95	0.95	0.90	0.80		

Acoustiscreen Panels have been tested in a reverberation chamber test to ISO354: 2003 "Measurement of Sound Absorption in a Reverberation Chamber"

Colours available

Acoustiscreen Polyester Hanging Screens are available in 43 colours in 9mm and 28 colours in 12mm thickness

12MM COLOR CHART





Decrasound Acoustiscreen

PET Polyester Fibre Hanging
Carved Screens

Fixing system options

Hanging –Hanging kits included





Free standing or mobile on wheels





Wall mounted—with backing panel and frame





Acoustiscreen Polyester Hanging Screens are available in either hanging, mobile or wall mounted options. This is to maximise the privacy and the acoustic benefit of the screens.




Decrasound Acoustiscreen

PET Polyester Fibre Hanging
Carved Screens

Carved Patterns

Acoustiscreen Carved Hanging Screens are available in over 50 standard patterns, an example of the range available as below. For additional designs please contact Sontext or your local distributor. If you have a custom pattern we can make this for you but confirmation would need to be sought from your local office.

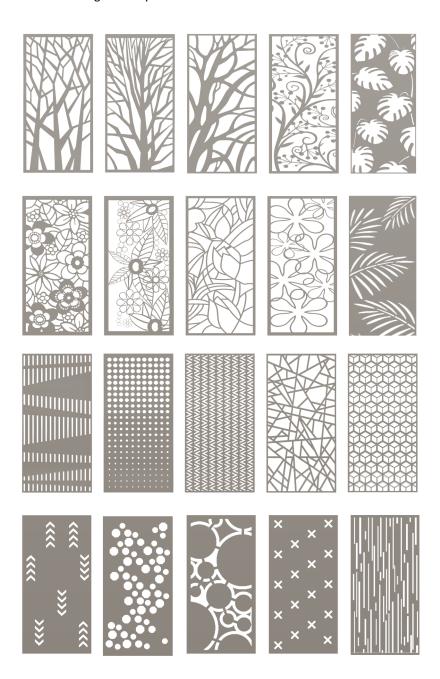

For more information visit www.sontext.com.au or contact Sontext or an Authorised Distributor

